



**INSTITUTO DE CIENCIAS  
DE LA CONSTRUCCIÓN  
EDUARDO TORROJA**

C/ Serrano Galvache n. 4 28033 Madrid (Spain)  
Tel.: (34) 91 302 04 40 Fax: (34) 91 302 07 00  
[direccion.ietcc@csic.es](mailto:direccion.ietcc@csic.es) [www.ietcc.csic.es](http://www.ietcc.csic.es)

## European Technical Assessment

## ETA 13/0605 of 06/10/2017

English translation prepared by IETcc. Original version in Spanish language

### General Part

**Technical Assessment Body issuing the ETA designated according to Art. 29 of Regulation (EU) 305/2011:**

Instituto de Ciencias de la Construcción Eduardo Torroja (IETcc)

**Trade name of the construction product**

**Anchor Cloverfix MTP  
Anchor Cloverfix MTP-G  
Anchor Cloverfix MTP-X**

**Product family to which the construction product belongs**

Torque controlled expansion anchor made of galvanized steel or sherardized steel of sizes M8, M10, M12, M16, M20 and M24 for use in concrete.

**Manufacturer**

**Técnicas Expansivas S.L.**  
Segador 13  
26006 Logroño (La Rioja) Spain.  
website: [www.indexfix.com](http://www.indexfix.com)

**Manufacturing plants**

Plant 2

**This European Technical Assessment contains**

14 pages including 3 annexes which form an integral part of this assessment. Annex D contains confidential information and is not included in the European Technical Assessment when that assessment is publicly disseminated

**This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of**

European Technical Assessment EAD 330232-00-0601 "Mechanical Fasteners for use in concrete", ed. October 2016

**This version replaces**

ETA 13/0605 issued on 16/07/2014

*English translation prepared by IETcc*

This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to article 25 (3) of Regulation (EU) No 305/2011.

English translation prepared by IETcc

## SPECIFIC PART

### 1. Technical description of the product

The Cloverfix MTP wedge anchor in the range of M8, M10, M12, M16, M20 and M24 is an anchor made of galvanised steel. The Cloverfix MTP-G wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of sherardized steel. The Cloverfix MTP-X wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of galvanized steel. The anchor is installed into a predrilled cylindrical hole and anchored by torque-controlled expansion. The anchorage is characterised by friction between expansion clip and concrete.

Product and product description is given in annex A.

### 2. Specification of the intended use in accordance with the applicable European Assessment Document.

The performances given in section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a mean to choosing the right products in relation to the expected economically reasonable working life of the works.

### 3. Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under static or quasi static loading	See annexes C1 to C3
Displacements under tension and shear loads	See annex C4
Characteristic resistance under seismic loading categories C1 and C2	See annex C5 and C6

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for class A1
Resistance to fire	See annex C7

#### 3.3 Hygiene, health and the environment (BWR 3)

This requirement is not relevant for the anchors.

#### 3.4 Safety in use (BWR 4)

The essential characteristics regarding safety in use are included under the basic works requirements Mechanical resistance and stability.

English translation prepared by IETcc

### 3.5 Protection against noise (BWR 5)

This requirement is not relevant for the anchors.

### 3.6 Energy economy and heat retention (BWR 6)

This requirement is not relevant for the anchors.

### 3.7 Sustainable use of natural resources (BWR 7)

No performance determined

## 4. Assessment and Verification of Constancy of Performances (hereinafter AVCP) system applied, with reference to its legal base

The applicable European legal act for the system of Assessment and Verification of Constancy of Performances (see annex V to Regulation (EU) No 305/2011) is 96/582/EC.

The system to be applied is 1.

## 5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document.

The technical details necessary for the implementation of the AVCP system are laid down in the quality plan deposited at Instituto de ciencias de la construcción Eduardo Torroja.



Instituto de ciencias de la construcción Eduardo Torroja  
CONSEJO SUPERIOR DE INVESTIGACIONES CIENTÍFICAS

C/ Serrano Galvache n.º 4. 28033 Madrid.  
Tel: (+34) 91 302 04 40 Fax. (+34) 91 302 07 00  
www.ietcc.csic.es




On behalf of the Instituto de Ciencias de la Construcción Eduardo Torroja  
Madrid, 6<sup>th</sup> of October 2017

Marta Mª Castellote Armero  
Director

**Product and installed condition**

Cloverfix MTP, MTP-G, MTP-X anchor

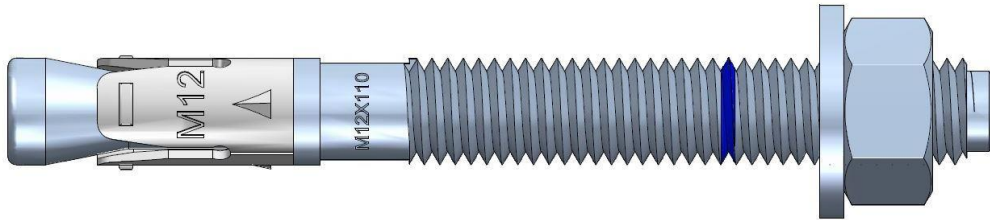


Identification on anchor:

- Expansion clip:
  - Anchor Cloverfix MTP: Company logo + "MTP" + Metric.
  - Anchor Cloverfix MTP-G: Company logo + "MTP-G" + Metric.
  - Anchor Cloverfix MTP-X: Company logo + "MTP-X" + Metric.
- Anchor body: Metric x Length
- Blue ring mark to show embedment depth
- Length letter code on head:

Letter on head	Length [mm]
C	68 ÷ 75
D	76 ÷ 88
E	89 ÷ 101
F	102 ÷ 113
G	114 ÷ 126
H	127 ÷ 139

Letter on head	Length [mm]
I	140 ÷ 151
J	152 ÷ 164
K	165 ÷ 177
L	178 ÷ 190
M	191 ÷ 202
N	203 ÷ 215

Letter on head	Length [mm]
P	229 ÷ 240
Q	241 ÷ 253
R	254 ÷ 266
S	267 ÷ 300

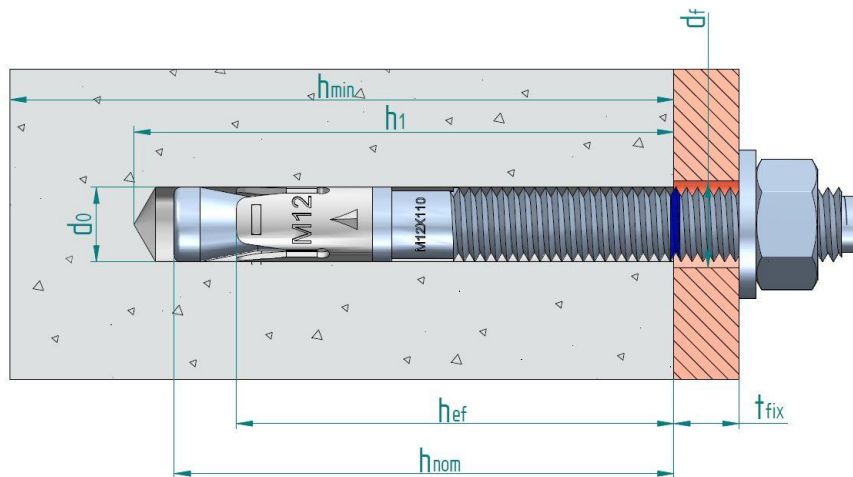

- $d_0$ : Nominal diameter of drill bit
- $d_f$ : Fixture clearance hole diameter
- $h_{ef}$ : Effective anchorage depth
- $h_1$ : Depth of drilled hole
- $h_{nom}$ : Overall anchor embedment depth in the concrete
- $h_{min}$ : Minimum thickness of concrete member
- $t_{fix}$ : Fixture thickness

**Cloverfix MTP, MTP-G, MTP-X anchors**

**Product description**

Installed condition

**Annex A1**

English translation prepared by IETcc

**Table A1: materials**

Item	Designation	Material for Cloverfix MTP	Material for Cloverfix MTP-G	Material for Cloverfix MTP-X
1	Anchor body	M8 to M20: carbon steel wire rod, galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2 with antifriction coating M24: machine carbon steel, galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2 with antifriction coating	Carbon steel wire rod, sherardized $\geq 40 \mu\text{m}$ EN 13811	Carbon steel wire rod, galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2 with antifriction coating
2	Washer	DIN 125, DIN 9021 galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2	DIN 125, DIN 9021 sherardized $\geq 40 \mu\text{m}$ EN 13811	DIN 125, DIN 9021 galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2
3	Nut	DIN 934 galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2, class 6	DIN 934 sherardized $\geq 40 \mu\text{m}$ EN 13811, class 6	DIN 934 galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2, class 6
4	Expansion clip	Stainless steel, grade A4	Stainless steel, grade A4	Carbon steel strip, sherardized $\geq 15 \mu\text{m}$ EN 13811

**Cloverfix MTP, MTP-G, MTP-X anchor**

**Product description**

Materials

**Annex A2**

## **Specifications of intended use**

### **Anchorage subjected to:**

- Static or quasi static loads
- Seismic actions:
  - for performance category C1:
    - Cloverfix MTP: M10, M12 and M16
    - Cloverfix MTP-X: M10, M12, M16 and M20
  - for performance category C2:
    - Cloverfix MTP: M12 and M16
    - Cloverfix MTP-X: M12 and M20
- Resistance to fire exposure up to 120 minutes: all versions and sizes

### **Base materials:**

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2008
- Strength classes C20/25 to C50/60 according to EN 206-1:2008
- Cracked or uncracked concrete

### **Use conditions (environmental conditions):**

- Anchorages subjected to dry internal conditions.

### **Design:**

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete.
- Verifiable calculation rules and drawings are prepared taking into account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method A in accordance with:
  - ETAG 001, Annex C, edition August 2010
  - CEN/TS 1992-4-1:2009
  - prEN1992-4
- Anchorages under seismic actions (cracked concrete) are designed in accordance with:
  - EOTA Technical Report TR 045, edition February 2013
  - prEN1992-4
  - Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure
  - Fastening in stand-off installation or with grout layer are not allowed.
- Anchorages under fire exposure are designed in accordance with:
  - ETAG 001, Annex C, design method A, edition August 2010 and EOTA Technical Report 020, edition May 2004
  - CEN/TS 1992-4-1:2009, annex D.
  - prEN 1992-4
  - It must be ensured that local spalling of the concrete cover does not occur.

### **Installation:**

- Hole drilling by rotary plus hammer mode.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.

<b>Cloverfix MTP, MTP-G, MTP-X anchor</b>	<b>Annex B1</b>
<b>Intended use</b>	
Specifications	

English translation prepared by IETcc


**Table C1: Installation parameters for Cloverfix MTP, MTP-G, MTP-X anchor**

Installation parameters			Performances					
			M8	M10	M12	M16	M20	M24
$d_0$	Nominal diameter of drill bit:	[mm]	8	10	12	16	20	24
$d_f$	Fixture clearance hole diameter:	[mm]	9	12	14	18	22	26
$T_{inst}$	Nominal installation torque:	[Nm]	20/15 <sup>1)</sup>	40	60	100	200	250
$L_{min}$	Total length of the bolt:	[mm]	68	82	98	119	140	175
$L_{max}$		[mm]	200	200	250	250	300	400
$h_{min}$	Minimum thickness of concrete member:	[mm]	100	120	140	170	200	250
$h_1$	Depth of drilled hole:	[mm]	60	75	85	105	125	155
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	55	68	80	97	114	143
$h_{ef}$	Effective anchorage depth:	[mm]	48	60	70	85	100	125
$t_{fix}$	Thickness of fixture <sup>2)</sup> :	[mm]	L - 66	L - 80	L - 96	L - 117	L - 138	L - 170
$S_{min}$	Minimum allowable spacing:	[mm]	50	60	70	85/128 <sup>1)</sup>	100/150 <sup>1)</sup>	125
$C_{min}$	Minimum allowable distance:	[mm]	50	60	70	85/128 <sup>1)</sup>	100/150 <sup>1)</sup>	125

<sup>1)</sup> Respective values for anchors MTP / MTP-G, MTP-X

<sup>2)</sup> L = total anchor length

**Installation process**

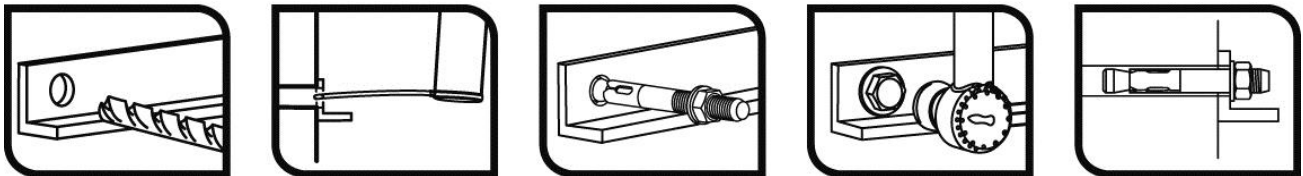

**Cloverfix MTP, MTP-G, MTP-X anchor**

**Performances**

Installation parameters and installation procedure

**Annex C1**



English translation prepared by IETcc

**Table C2: Characteristic values to tension loads of design method A according to ETAG 001, Annex C, CEN/TS 1992-4 or prEN1992-4 for Cloverfix MTP, MTP-G, MTP-X anchor**

Characteristic values of resistance to tension loads of design according to design method A		Performances							
		M8	M10	M12	M16	M20	M24		
<b>Tension loads: steel failure</b>									
$N_{Rk,s}$	Characteristic resistance:	[kN]	18.1	31.4	40.4	72.7	116.6	179.2	
$\gamma_{Ms}$	Partial safety factor:	[-]	1.5	1.5	1.5	1.5	1.5	1.5	
<b>Tension loads: pull-out failure in concrete</b>									
<b>Cloverfix MTP anchor</b>									
$N_{Rk,p,ucr}$	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	20	35	50	50	
$N_{Rk,p,cr}$	Characteristic resistance in C20/25 cracked concrete:	[kN]	5	9	12	25	30	30	
<b>Cloverfix MTP-G anchor</b>									
$N_{Rk,p,ucr}$	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	30	35	50	--	
$N_{Rk,p,cr}$	Characteristic resistance in C20/25 cracked concrete:	[kN]	6	9	16	25	30	--	
<b>Cloverfix MTP-X anchor</b>									
$N_{Rk,p,ucr}$	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	25	35	50	--	
$N_{Rk,p,cr}$	Characteristic resistance in C20/25 cracked concrete:	[kN]	6	9	16	25	30	--	
$\gamma_{ins}^{1)}$ $\gamma_2^{2)}$	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2	
$\psi_c$	Increasing factor for $N_{Rk,p}^0$ :	C30/37	[-]	1.22	1.16	1.22	1.22	1.16	1.22
		C40/50	[-]	1.41	1.31	1.41	1.41	1.31	1.41
		C50/60	[-]	1.55	1.41	1.55	1.55	1.41	1.55
<b>Tension loads: concrete cone and splitting failure</b>									
$h_{ef}$	Effective embedment depth:	[mm]	48	60	70	85	100	125	
$k_{ucr,N}^{1)}$	Factor for uncracked concrete:	[-]	11.0						
$k_{cr,N}^{1)}$	Factor for cracked concrete:	[-]	7,7						
$k_{ucr,N}^{2)}$	Factor for uncracked concrete:	[-]	10.1						
$k_{cr,N}^{2)}$	Factor for cracked concrete:	[-]	7,2						
$\gamma_{ins}^{1)}$ $\gamma_2^{2)}$	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2	
$S_{cr,N}$	Concrete cone failure:	[mm]	3 x $h_{ef}$						
$C_{cr,N}$		[mm]	1.5 x $h_{ef}$						
$S_{cr,sp}$	Splitting failure:	[mm]	288	300	350	425/510 <sup>3)</sup>	500/600 <sup>3)</sup>	560	
$C_{cr,sp}$		[mm]	144	150	175	213/255 <sup>3)</sup>	250/300 <sup>3)</sup>	280	

<sup>1)</sup> Parameter relevant only for design according to CEN/TS 1992-4:2009, prEN 1992-4

<sup>2)</sup> Parameter relevant only for design according to ETAG 001, Annex C

<sup>3)</sup> Respective values for anchors MTP / MTP-G, MTP-X

**Cloverfix MTP, MTP-G, MTP-X anchor**

**Performances**

Characteristic values for tension loads

**Annex C2**

English translation prepared by IETcc

**Table C3: Characteristic values to shear loads of design method A according to ETAG 001, Annex C, CEN/TS 1992-4 or prEN1992-4 for Cloverfix MTP, MTP-G, MTP-X anchor**

Characteristic values of resistance to shear loads of design according to design method A			Performances					
			M8	M10	M12	M16	M20	M24
<b>Shear loads: steel failure without lever arm</b>								
$V_{Rk,s}$	Characteristic resistance:	[kN]	11.0	17.4	25.3	47.1	73.1	84.7
$k_2^{1)}$	$k_2$ factor:	[-]	1.0					
$k_7^{2)}$	$k_7$ factor:	[-]	1.0					
$\gamma_{Ms}$	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
<b>Shear loads: steel failure with lever arm</b>								
$M_{Rk,s}^0$	Characteristic bending moment:	[Nm]	22.5	44.8	78.6	199.8	389.4	673.5
$\gamma_{Ms}$	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
<b>Shear loads: concrete pryout failure</b>								
$k_3^{1)}=k_8^{2)}$ $k^{3)}$	k factor:	[-]	1	2	2	2	2	2
$\gamma_{ins}^{1) 2)}$ $\gamma_2^{3)}$	Installation safety factor:	[-]	1.0					
<b>Shear loads: concrete edge failure</b>								
$l_f$	Effective length of anchor under shear loads:	[mm]	48	60	70	85	100	125
$d_{nom}$	Outside anchor diameter:	[mm]	8	10	12	16	20	24
$\gamma_{ins}^{1) 2)}$ $\gamma_2^{3)}$	Installation safety factor:	[-]	1.0					

<sup>1)</sup> Parameter relevant only for design according to CEN/TS 1992-4:2009

<sup>2)</sup> Parameter relevant only for design according to prEN 1992-4

<sup>3)</sup> Parameter relevant only for design according to ETAG 001, Annex C

**Cloverfix MTP, MTP-G, MTP-X anchor**

**Performances**

Characteristic values for shear load.

**Annex C3**

**Table C4: Displacements under tension load for Cloverfix MTP, MTP-G, MTP-X anchor**

Displacements under tension loads			Performances					
			M8	M10	M12	M16	M20	M24
<b>MTP anchor</b>								
N	Service tension load:	[kN]	2.5	4.3	6.3	10.4	13.9	18.0
$\bar{\delta}_{N0}$	Short term displacement:	[mm]	1.1	0.7	1.0	0.4	1.6	0.4
$\bar{\delta}_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	2.0
<b>MTP-G anchor</b>								
N	Service tension load:	[kN]	2.5	4.3	6.3	10.4	13.9	--
$\bar{\delta}_{N0}$	Short term displacement:	[mm]	1.0	1.1	0.9	1.5	1.2	--
$\bar{\delta}_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	--
<b>MTP-X anchor</b>								
N	Service tension load:	[kN]	2.5	4.3	7.6	11.9	14.3	--
$\bar{\delta}_{N0}$	Short term displacement:	[mm]	1.0	1.1	0.9	1.5	1.3	--
$\bar{\delta}_{N\infty}$	Long term displacement:	[mm]	1.6	1.6	1.6	1.6	1.6	--

**Table C5: Displacements under shear load for Cloverfix MTP, MTP-G, MTP-X anchor**

Displacements under shear loads			Performances					
			M8	M10	M12	M16	M20	M24
<b>Cloverfix MTP anchor</b>								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	33.6
$\bar{\delta}_{V0}$	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	1.4
$\bar{\delta}_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	2.1
<b>Cloverfix MTP-G anchor</b>								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	-
$\bar{\delta}_{V0}$	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	--
$\bar{\delta}_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	--
<b>Cloverfix MTP-X anchor</b>								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	--
$\bar{\delta}_{V0}$	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	--
$\bar{\delta}_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	--

Cloverfix MTP, MTP-G, MTP-X anchor

Performances

Displacements under tension and shear loads

Annex C4

English translation prepared by IETcc

**Table C6: Design information for seismic performance C1 Cloverfix MTP, MTP-X anchor**

Design information for seismic performance C1			Performances					
			M8	M10	M12	M16	M20	M24
<b>Steel failure for tension and shear failure</b>								
$N_{Rk,s,seis}$	Characteristic tension steel failure:	[kN]	--	31.4	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	--	1.5	1.5	1.5	1.5	--
$V_{Rk,p,seis}$	Characteristic shear steel failure:	[kN]	--	12.2	17.8	33.0	58.5	--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	--	1.25	1.25	1.25	1.25	--
<b>Pull out failure</b>								
<b>Cloverfix MTP anchor</b>								
$N_{Rk,p,seis}$	Characteristic pull out failure:	[kN]	--	5.3	8.4	17.5	--	--
<b>Cloverfix MTP-X anchor</b>								
$N_{Rk,p,seis}$	Characteristic pull out failure:	[kN]	--	3.9	16.0	25.0	30.0	--
$\gamma_{ins}^{1)}$ $\gamma_2^{2)}$	Installation safety factor:	[-]	--	1.0	1.0	1.0	1.0	--
<b>Concrete cone failure</b>								
$h_{ef}$	Effective embedment depth:	[mm]	--	60	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	--	3 x $h_{ef}$				--
$c_{cr,N}$	Edge distance:	[mm]	--	1.5 x $h_{ef}$				--
$\gamma_{ins}^{1)}$ $\gamma_2^{2)}$	Installation safety factor:	[-]	--	1.0	1.0	1.0	1.0	--
<b>Concrete pryout failure</b>								
$k_3^{1)}$ $k_2^{2)}$	k factor:	[-]	--	2	2	2	2	--
<b>Concrete edge failure</b>								
$l_f$	Effective length of anchor:	[kN]	--	60	70	85	100	--
$d_{nom}$	Outside anchor diameter:	[-]	--	10	12	16	20	--

<sup>1)</sup> Parameter relevant only for design according to CEN/TS 1992-4:2009, prEN 1992-4

<sup>2)</sup> Parameter relevant only for design according to ETAG 001, Annex C

<b>Cloverfix MTP, MTP-X anchor</b>	<b>Annex C5</b>
<b>Performances</b>	
Design information for seismic performance C1	

English translation prepared by IETcc

**Table C7: Design information for seismic performance C2 Cloverfix MTP, MTP-X anchor**

Design information for seismic performance C2			Performances					
			M8	M10	M12	M16	M20	M24
<b>Steel failure for tension and shear failure</b>								
$N_{Rk,s,seis}$	Characteristic tension steel failure:	[kN]	--	--	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	--	--	1.5	1.5	1.5	--
$V_{Rk,p,seis}$	Characteristic shear steel failure:	[kN]	--	--	17.8	33.0	58.5	--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	--	--	1.25	1.25	1.25	--
<b>Pull out failure</b>								
<b>Cloverfix MTP anchor</b>								
$N_{Rk,p,seis}$	Characteristic pull out failure:	[kN]	--	--	5.2	8.9	--	--
<b>Cloverfix MTP-X anchor</b>								
$N_{Rk,p,seis}$	Characteristic pull out failure:	[kN]	--	--	9.1	--	21.0	--
$\gamma_{ins}^{1)}$ $\gamma_2^{2)}$	Installation safety factor:	[-]	--	--	1.0	1.0	1.0	--
<b>Concrete cone failure</b>								
$h_{ef}$	Effective embedment depth:	[mm]	--	--	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	--	--	3 x $h_{ef}$			--
$c_{cr,N}$	Edge distance:	[mm]	--	--	1.5 x $h_{ef}$			--
$\gamma_{ins}^{1)}$ $\gamma_2^{2)}$	Installation safety factor:	[-]	--	--	1.0	1.0	1.0	--
<b>Concrete pryout failure</b>								
$k_3^{1)}$ $k^{2)}$	k factor:	[-]	--	--	2	2	2	--
<b>Concrete edge failure</b>								
$l_f$	Effective length of anchor:	[kN]	--	--	70	85	100	--
$d_{nom}$	Outside anchor diameter:	[-]	--	--	12	16	20	--
<b>Displacements</b>								
<b>Cloverfix MTP anchor</b>								
$\bar{O}_{N,seis} (DLS)$	Displacement Damage Limitation State: <sup>3) 4)</sup>	[mm]	--	--	2.34	3.99	--	--
$\bar{O}_{V,seis} (DLS)$		[mm]	--	--	5.53	5.96	--	--
$\bar{O}_{N,seis} (ULS)$	Displacement Ultimate Limit State: <sup>3)</sup>	[mm]	--	--	9.54	10.17	--	--
$\bar{O}_{V,seis} (ULS)$		[mm]	--	--	9.08	10.66	--	--
<b>Cloverfix MTP-X anchor</b>								
$\bar{O}_{N,seis} (DLS)$	Displacement Damage Limitation State: <sup>3) 4)</sup>	[mm]	--	--	5.57	--	6.82	--
$\bar{O}_{V,seis} (DLS)$		[mm]	--	--	5.53	--	6.37	--
$\bar{O}_{N,seis} (ULS)$	Displacement Ultimate Limit State: <sup>3)</sup>	[mm]	--	--	20.31	--	29.12	--
$\bar{O}_{V,seis} (ULS)$		[mm]	--	--	9.08	--	12.32	--

<sup>1)</sup> Parameter relevant only for design according to CEN/TS 1992-4:2009, prEN 1992-4

<sup>2)</sup> Parameter relevant only for design according to ETAG 001, Annex C

<sup>3)</sup> The listed displacements represent mean values

<sup>4)</sup> A small displacement may be required in the design in the case of displacements sensitive fastening of "rigid" supports. The characteristics resistance associated with such small displacements may be determined by linear interpolation or proportional reduction.

**Cloverfix MTP, MTP-X anchor**

**Performances**

Design information for seismic performance C2

**Annex C6**

**Table C8: Characteristic values for resistance to fire Cloverfix MTP, MTP-G, MTP-X anchor**

Characteristic values for resistance to fire			Performances					
			M8	M10	M12	M16	M20	M24
<b>Steel failure</b>								
$N_{Rk,s,fi}$	Characteristic tension resistance:	R30 [kN]	0,4	0,9	1,7	3,1	4,9	7,1
		R60 [kN]	0,3	0,8	1,3	2,4	3,7	5,3
		R90 [kN]	0,3	0,6	1,1	2,0	3,2	4,6
		R120 [kN]	0,2	0,5	0,8	1,6	2,5	3,5
$V_{Rk,s,fi}$	Characteristic shear resistance:	R30 [kN]	0,4	0,9	1,7	3,1	4,9	7,1
		R60 [kN]	0,3	0,8	1,3	2,4	3,7	5,3
		R90 [kN]	0,3	0,6	1,1	2,0	3,2	4,5
		R120 [kN]	0,2	0,5	0,8	1,6	2,5	3,5
$M^0_{Rk,s,fi}$	Characteristic bending resistance:	R30 [kN]	0,4	1,1	2,6	6,7	13,0	22,5
		R60 [kN]	0,3	1,0	2,0	5,0	9,7	16,8
		R90 [kN]	0,3	0,7	1,7	4,3	8,4	14,6
		R120 [kN]	0,2	0,6	1,3	3,3	6,5	11,2
<b>Pull out failure</b>								
$N_{Rk,p,fi}$	Characteristic resistance:	R30 [kN]	1,3/1,5 <sup>3)</sup>	2,3	3,0/4,0 <sup>3)</sup>	6,3	7,5	7,5
		R60 [kN]						
		R90 [kN]						
		R120 [kN]	1,0/1,2 <sup>3)</sup>	1,8	2,4/3,2 <sup>3)</sup>	5,0	6,0	6,0
<b>Concrete cone failure <sup>4)</sup></b>								
$N_{Rk,p,fi}$	Characteristic resistance:	R30 [kN]	2,9	5,0	7,4	12,0	18,0	31,4
		R60 [kN]						
		R90 [kN]						
		R120 [kN]	2,3	4,0	5,9	9,6	14,4	25,2
$s_{cr,N,fi}$	Critical spacing:	R30 to R120 [mm]	4 x $h_{ef}$					
$s_{min,fi}$	Minimum spacing:	R30 to R120 [mm]	50	60	70	85/128 <sup>3)</sup>	100/150 <sup>3)</sup>	125
$c_{cr,N,fi}$	Critical edge distance:	R30 to R120 [mm]	2 x $h_{ef}$					
$c_{min,fi}$	Minimum edge distance:	R30 to R120 [mm]	$c_{min} = 2 \times h_{ef}$ ; if fire attack comes from more than one side, the edge distance of the anchor has to be $\geq 300$ mm and $\geq 2 \times h_{ef}$					
<b>Concrete pry out failure</b>								
$k_3^{1)}$ $k^{2)}$	k factor:	R30 to R120 [-]	1	2	2	2	2	2

<sup>1)</sup> Parameter relevant only for design according to CEN/TS 1992-4:2009, prEN 1992-4

<sup>2)</sup> Parameter relevant only for design according to ETAG 001, Annex C

<sup>3)</sup> Respective values for anchors MTP / MTP-G, MTP-X

<sup>4)</sup> As a rule, splitting failure can be neglected since cracked concrete and reinforcement is assumed.

<sup>5)</sup> In absence of other national regulations the partial safety factor for resistance under fire exposure  $\gamma_{m,fi} = 1,0$  is recommended

**Cloverfix MTP, MTP-G, MTP-X anchor**

**Performances**

Characteristic values for resistance to fire

**Annex C7**