



**INSTITUTO DE CIENCIAS  
DE LA CONSTRUCCIÓN  
EDUARDO TORROJA**

C/ Serrano Galvache n. 4 28033 Madrid (Spain)  
Tel.: (34) 91 302 04 40 Fax: (34) 91 302 07 00  
[direccion.ietcc@csic.es](mailto:direccion.ietcc@csic.es) <https://dit.ietcc.csic.es>

**European Technical  
Assessment**

**ETA 20/1288  
of 11/06/2024**

English translation prepared by IETcc. Original version in Spanish language

**General Part**

**Technical Assessment Body issuing  
the ETA designated according to  
Art. 29 of Regulation (EU) 305/2011:**

Instituto de Ciencias de la Construcción Eduardo  
Torroja (IETcc)

**Trade name of the construction  
product:**

**TRSA / TRSAK**

**Product family to which the  
construction product belongs:**

Deformation controlled anchor made of galvanized  
steel of sizes M6, M8, M10, M12, M16 and M20 for  
use in non-cracked concrete

**Manufacturer:**

**THALE sp. z.o.o sp. k.**  
Wilimowo 2  
11-041 Olsztyn, Poland.  
website: [www.niczuk.pl](http://www.niczuk.pl)

**Manufacturing plants:**

Thale plant 2

**This European Technical  
Assessment contains:**

10 pages including 3 annexes which form an  
integral part of this assessment.

**This European Technical  
Assessment is issued in accordance  
with regulation (EU) No 305/2011, on  
the basis of:**

European Assessment Document EAD 330232-  
00-0601 "Mechanical Fasteners for use in  
concrete", ed. October 2016

**This ETA replaces:**

Corrigendum of ETA 20/1288 issued on  
11/06/2024

Código seguro de Verificación : GEN-3753-a67a-9eff-f185-ad84-afdb-30e5-5128 | Puede verificar la integridad de este documento en la siguiente dirección :  
<https://sede.administracion.gob.es/pagSedeFront/servicios/consultaCSV.htm>

CSV : GEN-3753-a67a-9eff-f185-ad84-afdb-30e5-5128

DIRECCIÓN DE VALIDACIÓN : <https://sede.administracion.gob.es/pagSedeFront/servicios/consultaCSV.htm>

FIRMANTE(1) : ANGEL CASTILLO TALAVERA | FECHA : 27/01/2025 14:47 | Sin acción específica



This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to article 25 (3) of Regulation (EU) No 305/2011.

Código seguro de Verificación : GEN-3753-a67a-9eff-f185-ad84-afdb-30e5-5128 | Puede verificar la integridad de este documento en la siguiente dirección :  
<https://sede.administracion.gob.es/pagSedeFront/servicios/consultaCSV.htm>

---

CSV : GEN-3753-a67a-9eff-f185-ad84-afdb-30e5-5128

DIRECCIÓN DE VALIDACIÓN : <https://sede.administracion.gob.es/pagSedeFront/servicios/consultaCSV.htm>

FIRMANTE(1) : ANGEL CASTILLO TALAVERA | FECHA : 27/01/2025 14:47 | Sin acción específica



## SPECIFIC PART

### 1. Technical description of the product

The Thale TRSA / TRSAK in the range of M6 to M20 is an anchor made of galvanised steel, which is placed into a drilled hole and anchored by deformation-controlled expansion. The anchorage is characterised by friction between the sleeve and concrete.

The product and its description are shown in annex A.

### 2. Specification of the intended use in accordance with the applicable European Assessment Document.

The performances given in section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in annex B.

The verifications and assessment methods on which this European Technical Assessment is based, lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a mean to choosing the right products in relation to the expected economically reasonable working life of the works.

### 3. Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic                                       | Performance           |
|----------------------------------------------------------------|-----------------------|
| Characteristic resistance under static or quasi static loading | See annexes C1 to C3  |
| Displacements under tension and shear loads                    | See annexes C2 and C3 |

#### 3.2 Safety in case of fire (BWR 2)

| Essential characteristic | Performance                                 |
|--------------------------|---------------------------------------------|
| Reaction to fire         | Anchorage satisfy requirements for class A1 |

### 4. Assessment and Verification of Constancy of Performances (hereinafter AVCP) system applied, with reference to its legal base

The applicable European legal act for the system of Assessment and Verification of Constancy of Performances (see annex V to Regulation (EU) No 305/2011) is 96/0582/EC.

The system to be applied is 1.



**5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document.**

The technical details necessary for the implementation of the AVCP system are laid down in the quality plan deposited at Instituto de Ciencias de la Construcción Eduardo Torroja.

Prepared by: PhD Julián Rivera (Innovative Products Assessment Unit, IETcc-CSIC)

Issued in Madrid, 11<sup>th</sup> of June 2024

On behalf of the Instituto de Ciencias de la Construcción Eduardo Torroja

Mr. Ángel Castillo Talavera


Director IETcc-CSIC

Código seguro de Verificación : GEN-3753-a67a-9eff-f185-ad84-afdb-30e5-5128 | Puede verificar la integridad de este documento en la siguiente dirección :  
<https://sede.administracion.gob.es/pagSedeFront/servicios/consultaCSV.htm>



**Product**


**TRSA, TRSAK anchor**

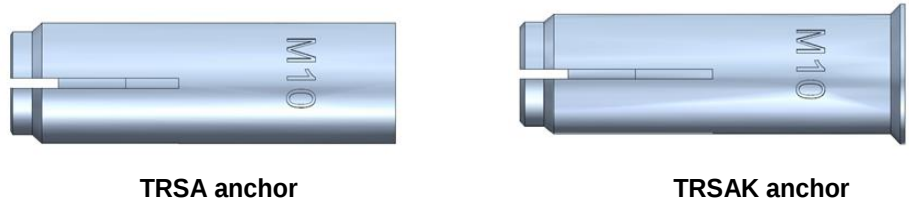

Identification on sleeve: Thale logo + “TRSA (TRSAK)” + Metric

| Anchor dimensions     |      | M6 | M8 | M10 | M12 | M16 | M20 |
|-----------------------|------|----|----|-----|-----|-----|-----|
| ØD: External diameter | [mm] | 8  | 10 | 12  | 15  | 20  | 25  |
| Ød: internal diameter | [mm] | M6 | M8 | M10 | M12 | M16 | M20 |
| L: total length       | [mm] | 25 | 30 | 40  | 50  | 65  | 80  |

**Setting tool**

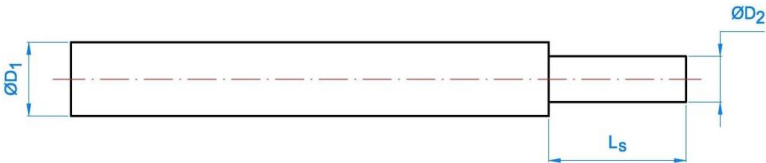

| Setting tool dimensions |      | M6  | M8  | M10  | M12  | M16  | M20  |
|-------------------------|------|-----|-----|------|------|------|------|
| Ø D <sub>1</sub>        | [mm] | 7,5 | 9,5 | 11,5 | 14,5 | 18,0 | 22,0 |
| Ø D <sub>2</sub>        | [mm] | 5,0 | 6,5 | 8,0  | 10,2 | 13,5 | 16,5 |
| L <sub>s</sub>          | [mm] | 15  | 18  | 21   | 30   | 36   | 48   |

Setting tool could be assembled with a plastic handle for hand protection purposes

**TRSA, TRSAK anchor**


**Product description**

Product

**Annex A1**



**Installed condition**

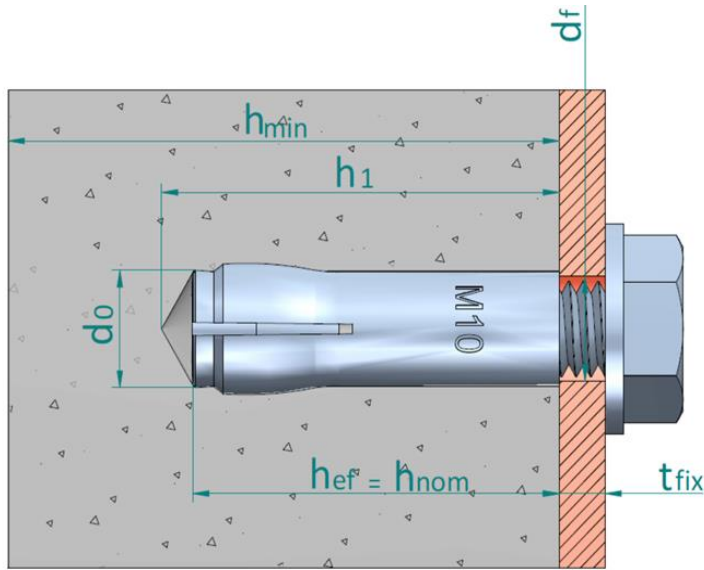

- $h_{ef}$ : Effective anchorage depth  
 $h_1$ : Depth of drilled hole  
 $h_{nom}$ : Overall anchor embedment depth in the concrete  
 $h_{min}$ : Minimum thickness of concrete member  
 $t_{fix}$ : Thickness of fixture  
 $d_o$ : Nominal diameter of drill bit  
 $d_f$ : Fixture clearance hole diameter

**Table A1: materials**

| Item | Designation      | Material for TRSA / TRSAK                                           |
|------|------------------|---------------------------------------------------------------------|
| 1    | Sleeve           | Carbon steel wire rod, zinc plated $\geq 5 \mu\text{m}$ ISO 4042 A2 |
| 2    | Cone             | Carbon steel wire rod, zinc plated $\geq 5 \mu\text{m}$ ISO 4042 A2 |
| 3    | Plastic retainer | PVC                                                                 |

TRSA, TRSAK anchor

Product description

Installed condition and Materials

Annex A2



### **Specifications of intended use**

#### **Anchorage subjected to:**

- Static or quasi static loads

#### **Base materials:**

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2008
- Strength classes C20/25 to C50/60 according to EN 206-1:2008
- Uncracked concrete

#### **Use conditions (environmental conditions):**

- Anchorages subjected to dry internal conditions.

#### **Design:**

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete.
- Verifiable calculation rules and drawings are prepared taking into account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method A in accordance with EN 1992-4:2018

#### **Installation:**

- Hole drilling by rotary plus hammer mode.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.
- The bolt or threaded rod to be used shall be property class 4.6 / 4.8 / 5.6 / 5.8 / 6.8 or 8.8 according to ISO 898-1.
- The length of the bolt shall be determined as:
  - Minimum bolt length =  $t_{fix} + l_{s,min}$
  - Maximum bolt length =  $t_{fix} + l_{s,max}$

**TRSA, TRSAK anchor**

**Intended use**

**Specifications**


**Annex B1**



**Table C1: Installation parameters for TRSA, TRSAK anchor**

| Installation parameters |                                               |      | Performances |     |     |     |     |     |
|-------------------------|-----------------------------------------------|------|--------------|-----|-----|-----|-----|-----|
|                         |                                               |      | M6           | M8  | M10 | M12 | M16 | M20 |
| $d_o$                   | Nominal diameter of drill bit:                | [mm] | 8            | 10  | 12  | 15  | 20  | 25  |
| $D$                     | Thread diameter:                              | [mm] | M6           | M8  | M10 | M12 | M16 | M20 |
| $d_f$                   | Fixture clearance hole diameter $\leq$        | [mm] | 7            | 9   | 12  | 14  | 18  | 22  |
| $T_{inst}$              | Maximum installation torque:                  | [Nm] | 4            | 11  | 17  | 38  | 60  | 100 |
| $l_{s,min}$             | Minimum screwing depth:                       | [mm] | 6            | 8   | 10  | 12  | 16  | 20  |
| $l_{s,max}$             | Maximum screwing depth:                       | [mm] | 10           | 13  | 17  | 21  | 27  | 34  |
| $h_{min}$               | Minimum thickness of concrete member:         | [mm] | 100          | 100 | 100 | 100 | 130 | 160 |
| $h_1$                   | Depth of drilled hole:                        | [mm] | 27           | 33  | 43  | 54  | 70  | 86  |
| $h_{nom}$               | Overall anchor embedm. depth in the concrete: | [mm] | 25           | 30  | 40  | 50  | 65  | 80  |
| $h_{ef}$                | Effective anchorage depth:                    | [mm] | 25           | 30  | 40  | 50  | 65  | 80  |
| $s_{min}$               | Minimum allowable spacing:                    | [mm] | 60           | 60  | 80  | 100 | 130 | 160 |
| $c_{min}$               | Minimum allowable distance:                   | [mm] | 105          | 105 | 140 | 175 | 230 | 280 |

### Installation process

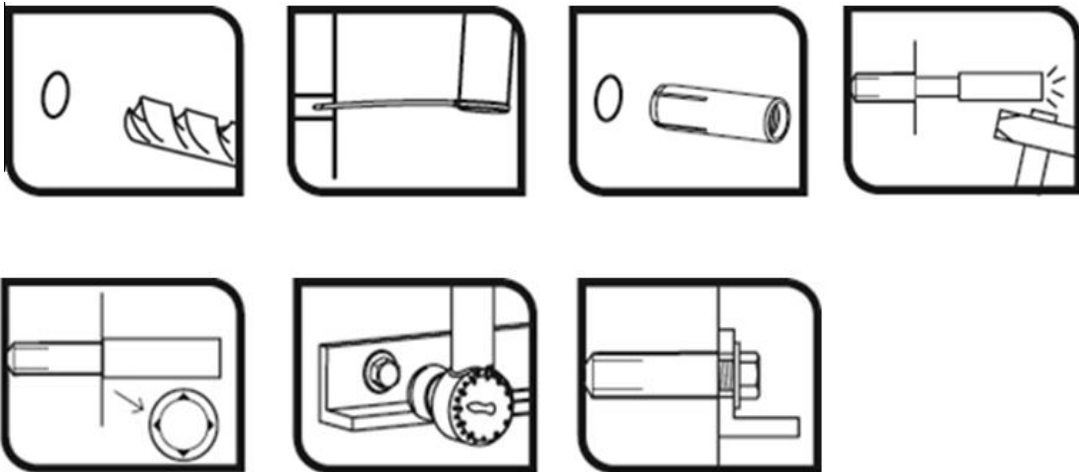

TRSA, TRSAK anchor

Performances

Installation parameters and installation procedure

Annex C1



**Table C2: Characteristic values to tension loads of design method A according to EN 1992-4 for TRSA, TRSAK anchor**

| Characteristic values of resistance to tension loads of design according to design method A |                                                                 |        | Performances          |       |       |       |       |       |      |
|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------|--------|-----------------------|-------|-------|-------|-------|-------|------|
|                                                                                             |                                                                 |        | M6                    | M8    | M10   | M12   | M16   | M20   |      |
| Tension loads: steel failure                                                                |                                                                 |        |                       |       |       |       |       |       |      |
| N <sub>Rk,s</sub>                                                                           | Tension steel char. resistance, steel class 4.6:                | [kN]   | 8,0                   | 14,6  | 23,2  | 33,7  | 62,8  | 98,0  |      |
| γ <sub>Ms</sub> <sup>1)</sup>                                                               | Partial safety factor:                                          | [-]    | 2,0                   | 2,0   | 2,0   | 2,0   | 2,0   | 2,0   |      |
| N <sub>Rk,s</sub>                                                                           | Tension steel char. resistance, steel class 4.8:                | [kN]   | 8,0                   | 14,6  | 18,2  | 33,7  | 62,8  | 95,1  |      |
| γ <sub>Ms</sub> <sup>1)</sup>                                                               | Partial safety factor:                                          | [-]    | 1,5                   | 1,5   | 1,5   | 1,5   | 1,5   | 1,5   |      |
| N <sub>Rk,s</sub>                                                                           | Tension steel char. resistance, steel class 5.6:                | [kN]   | 10,1                  | 18,3  | 18,2  | 42,2  | 78,5  | 122,5 |      |
| γ <sub>Ms</sub> <sup>1)</sup>                                                               | Partial safety factor:                                          | [-]    | 2,0                   | 2,0   | 1,5   | 2,0   | 2,0   | 2,0   |      |
| N <sub>Rk,s</sub>                                                                           | Tension steel char. resistance, steel class 5.8:                | [kN]   | 10,1                  | 17,6  | 18,2  | 35,1  | 65,0  | 95,1  |      |
| γ <sub>Ms</sub> <sup>1)</sup>                                                               | Partial safety factor:                                          | [-]    | 1,5                   | 1,5   | 1,5   | 1,5   | 1,5   | 1,5   |      |
| N <sub>Rk,s</sub>                                                                           | Tension steel char. resistance, steel class 6.8                 | [kN]   | 12,1                  | 17,6  | 18,2  | 35,1  | 65,0  | 95,1  |      |
| γ <sub>Ms</sub> <sup>1)</sup>                                                               | Partial safety factor:                                          | [-]    | 1,5                   | 1,5   | 1,5   | 1,5   | 1,5   | 1,5   |      |
| N <sub>Rk,s</sub>                                                                           | Tension steel char. resistance, steel class 8.8                 | [kN]   | 13,1                  | 17,6  | 18,2  | 35,1  | 65,0  | 95,1  |      |
| γ <sub>Ms</sub> <sup>1)</sup>                                                               | Partial safety factor:                                          | [-]    | 1,5                   | 1,5   | 1,5   | 1,5   | 1,5   | 1,5   |      |
| Tension loads: pull-out failure in concrete                                                 |                                                                 |        |                       |       |       |       |       |       |      |
| N <sub>Rk,p,ucr</sub>                                                                       | Tension characteristic resistance in C20/25 uncracked concrete: | [kN]   | -- 2)                 | -- 2) | -- 2) | -- 2) | -- 2) | -- 2) |      |
| ψ <sub>c</sub>                                                                              | Increasing factor for N <sup>0</sup> <sub>Rk,p</sub> :          | C30/37 | [-]                   | 1,02  | 1,22  | 1,15  | 1,15  | 1,22  | 1,19 |
|                                                                                             |                                                                 | C40/50 | [-]                   | 1,04  | 1,41  | 1,29  | 1,28  | 1,41  | 1,35 |
|                                                                                             |                                                                 | C50/60 | [-]                   | 1,05  | 1,55  | 1,37  | 1,37  | 1,55  | 1,46 |
| γ <sub>inst</sub>                                                                           | Installation safety factor:                                     | [-]    | 1,2                   | 1,2   | 1,4   | 1,4   | 1,4   | 1,4   |      |
| Tension loads: concrete cone and splitting failure                                          |                                                                 |        |                       |       |       |       |       |       |      |
| h <sub>ef</sub>                                                                             | Effective embedment depth:                                      | [mm]   | 25                    | 30    | 40    | 50    | 65    | 80    |      |
| k <sub>ucr,N</sub>                                                                          | Factor for uncracked concrete:                                  | [-]    | 11.0                  |       |       |       |       |       |      |
| γ <sub>inst</sub>                                                                           | Installation safety factor:                                     | [-]    | 1,2                   | 1,2   | 1,4   | 1,4   | 1,4   | 1,4   |      |
| S <sub>cr,N</sub>                                                                           | Concrete cone failure:                                          | [mm]   | 3 x h <sub>ef</sub>   |       |       |       |       |       |      |
| C <sub>cr,N</sub>                                                                           |                                                                 | [mm]   | 1.5 x h <sub>ef</sub> |       |       |       |       |       |      |
| S <sub>cr,sp</sub>                                                                          | Splitting failure:                                              | [mm]   | 150                   | 180   | 240   | 300   | 390   | 480   |      |
| C <sub>cr,sp</sub>                                                                          |                                                                 | [mm]   | 75                    | 90    | 120   | 150   | 195   | 240   |      |
| Displacements under tension loads                                                           |                                                                 |        |                       |       |       |       |       |       |      |
| N                                                                                           | Service tension load in uncracked concrete C20/25 to C50/60:    | [kN]   | 2,4                   | 3,4   | 6,0   | 7,4   | 17,8  | 18,2  |      |
| δ <sub>N0</sub>                                                                             | Short term displacement under tension loads:                    | [mm]   | 0,1                   | 0,1   | 0,1   | 0,1   | 0,1   | 0,1   |      |
| δ <sub>N∞</sub>                                                                             | Long term displacement under tension loads:                     | [mm]   | 0,3                   | 0,3   | 0,3   | 0,3   | 0,3   | 0,3   |      |

- <sup>1)</sup> In absence of other national regulations  
<sup>2)</sup> Pull out failure does not govern

TRSA, TRSAK anchor

Performances

Characteristic values for tension loads

Annex C2



**Table C3: Characteristic values to shear loads of design method A according to EN 1992-4 for TRSA, TRSAK anchor**

| Characteristic values of resistance to shear loads of design according to design method A |                                                            |      | Performances |      |      |       |       |       |
|-------------------------------------------------------------------------------------------|------------------------------------------------------------|------|--------------|------|------|-------|-------|-------|
|                                                                                           |                                                            |      | M6           | M8   | M10  | M12   | M16   | M20   |
| Shear loads: steel failure without lever arm                                              |                                                            |      |              |      |      |       |       |       |
| $V_{Rk,s}$                                                                                | Shear steel char. resistance, steel class 4.6:             | [kN] | 4,0          | 7,3  | 11,6 | 16,8  | 31,4  | 49,0  |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,67         | 1,67 | 1,67 | 1,67  | 1,67  | 1,67  |
| $V_{Rk,s}$                                                                                | Shear steel char. resistance, steel class 4.8:             | [kN] | 4,0          | 7,3  | 9,1  | 16,8  | 31,4  | 47,5  |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,25         | 1,25 | 1,25 | 1,25  | 1,25  | 1,25  |
| $V_{Rk,s}$                                                                                | Shear steel char. resistance, steel class 5.6              | [kN] | 5,0          | 9,1  | 9,1  | 21,1  | 39,2  | 61,2  |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,67         | 1,67 | 1,25 | 1,67  | 1,67  | 1,67  |
| $V_{Rk,s}$                                                                                | Shear steel char. resistance, steel class 5.8              | [kN] | 5,0          | 8,8  | 9,1  | 17,5  | 32,5  | 47,5  |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,25         | 1,25 | 1,25 | 1,25  | 1,25  | 1,25  |
| $V_{Rk,s}$                                                                                | Shear steel char. resistance, steel class 6.8              | [kN] | 6,0          | 8,8  | 9,1  | 17,5  | 32,5  | 47,5  |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,25         | 1,25 | 1,25 | 1,25  | 1,25  | 1,25  |
| $V_{Rk,s}$                                                                                | Shear steel char. resistance, steel class 8.8:             | [kN] | 6,5          | 8,8  | 9,1  | 17,5  | 32,5  | 47,5  |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,25         | 1,25 | 1,25 | 1,25  | 1,25  | 1,25  |
| Shear loads: steel failure with lever arm                                                 |                                                            |      |              |      |      |       |       |       |
| $M_{Rk,s}^0$                                                                              | Characteristic bending moment, steel class 4.6             | [Nm] | 6,1          | 15,0 | 29,9 | 52,4  | 133,3 | 259,8 |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,67         | 1,67 | 1,67 | 1,67  | 1,67  | 1,67  |
| $M_{Rk,s}^0$                                                                              | Characteristic bending moment, steel class 4.8             | [Nm] | 6,1          | 15,0 | 29,9 | 52,4  | 133,3 | 259,8 |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,25         | 1,25 | 1,25 | 1,25  | 1,25  | 1,25  |
| $M_{Rk,s}^0$                                                                              | Characteristic bending moment, steel class 5.6             | [Nm] | 7,6          | 18,8 | 37,4 | 65,5  | 166,6 | 324,8 |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,67         | 1,67 | 1,67 | 1,67  | 1,67  | 1,67  |
| $M_{Rk,s}^0$                                                                              | Characteristic bending moment, steel class 5.8             | [Nm] | 7,6          | 18,8 | 37,4 | 65,5  | 166,6 | 324,8 |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,25         | 1,25 | 1,25 | 1,25  | 1,25  | 1,25  |
| $M_{Rk,s}^0$                                                                              | Characteristic bending moment, steel class 6.8             | [Nm] | 9,2          | 22,5 | 44,9 | 78,7  | 199,9 | 389,7 |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor:                                     | [-]  | 1,25         | 1,25 | 1,25 | 1,25  | 1,25  | 1,25  |
| $M_{Rk,s}^0$                                                                              | Characteristic bending moment, steel class 8.8             | [Nm] | 12,2         | 30,0 | 59,9 | 104,9 | 266,6 | 519,7 |
| $\gamma_{Ms}^{(1)}$                                                                       | Partial safety factor: <sup>1)</sup>                       | [-]  | 1,25         | 1,25 | 1,25 | 1,25  | 1,25  | 1,25  |
| Shear loads: concrete pryout failure                                                      |                                                            |      |              |      |      |       |       |       |
| $k_8$                                                                                     | $k_8$ factor:                                              | [-]  | 1,0          | 1,0  | 1,0  | 1,0   | 2,0   | 2,0   |
| $\gamma_{inst}$                                                                           | Installation safety factor:                                | [-]  | 1,0          |      |      |       |       |       |
| Shear loads: concrete edge failure                                                        |                                                            |      |              |      |      |       |       |       |
| $l_f$                                                                                     | Effective anchorage depth under shear loads:               | [mm] | 25           | 30   | 40   | 50    | 65    | 80    |
| $d_{nom}$                                                                                 | Outside anchor diameter:                                   | [mm] | 8            | 10   | 12   | 15    | 20    | 25    |
| $\gamma_{inst}$                                                                           | Installation safety factor:                                | [-]  | 1,0          |      |      |       |       |       |
| Displacements under shear loads                                                           |                                                            |      |              |      |      |       |       |       |
| $V$                                                                                       | Service shear load in uncracked concrete C20/25 to C50/60: | [kN] | 3,8          | 5,0  | 5,2  | 10,1  | 18,6  | 27,2  |
| $\delta_{V0}$                                                                             | Short term displacement under shear loads:                 | [mm] | 2,4          | 2,4  | 2,4  | 1,3   | 1,0   | 1,0   |
| $\delta_{V\infty}$                                                                        | Long term displacement under shear loads:                  | [mm] | 3,5          | 3,5  | 3,5  | 2,0   | 1,5   | 1,5   |

<sup>1)</sup> In absence of other national regulations

TRSA, TRSAK anchor

Performances

Characteristic values for shear load.

Annex C3

