



**INSTITUTO DE CIENCIAS
DE LA CONSTRUCCIÓN
EDUARDO TORROJA**

C/ Serrano Galvache n. 4 28033 Madrid (Spain)
Tel.: (34) 91 302 04 40
direccion.ietcc@csic.es <https://dit.ietcc.csic.es>



European Technical Assessment

ETA 22/0803
17/02/2025

English translation prepared by IETcc. Original version in Spanish language

General Part

Technical Assessment Body issuing the ETA designated according to Art. 29 of Regulation (EU) 305/2011:

Instituto de Ciencias de la Construcción Eduardo Torroja (IETcc)

Trade name of the construction product:
Product family to which the construction product belongs:

Anchors BTP, BTP-G, BTP-X, BTP-A4

Torque controlled expansion anchor made of galvanized steel, sherardized steel or stainless steel of sizes M8, M10, M12, M16, M20 and M24 for use in cracked or uncracked concrete.

Manufacturer:

Ningbo Bigood Metal Technology Co. Ltd.
No 19, Eastern section of Hongtang South Road
Ningbo. China.
website: www.nbbigood.com

Manufacturing plants:

Ningbo Bigood Metal Technology plant 1.

This European Technical Assessment contains:

21 pages including 3 annexes which form an integral part of this assessment.

This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of:

European Assessment Document EAD 330232-01-0601 "Mechanical fasteners for use in concrete", ed. December 2019

This version replaces

ETA 22/0803 version 0 issued on 22/11/2022



English translation prepared by IETcc

This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to article 25 (3) of Regulation (EU) No 305/2011.

Código seguro de Verificación : GEN-0422-c0b2-8e5e-ca27-db1b-87d9-c5d9-5241 | Puede verificar la integridad de este documento en la siguiente dirección : <https://sede.administracion.gob.es/pagSedeFront/servicios/consultaCSV.htm>

CSV : GEN-0422-c0b2-8e5e-ca27-db1b-87d9-c5d9-5241

DIRECCIÓN DE VALIDACIÓN : <https://sede.administracion.gob.es/pagSedeFront/servicios/consultaCSV.htm>

FIRMANTE(1) : ANGEL CASTILLO TALAVERA | FECHA : 18/02/2025 14:36 | Sin acción específica



SPECIFIC PART

1. Technical description of the product

The Bigood BTP wedge anchor in the range of M8, M10, M12, M16, M20 and M24 is an anchor made of galvanised steel. The Bigood BTP-G wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of sherardized steel. The Bigood BTP-X wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of galvanized steel. The Bigood BTP-A4 wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of stainless steel. The anchor is installed into a predrilled cylindrical hole and anchored by torque-controlled expansion. The anchorage is characterized by friction between expansion clip and concrete.

Product and installation descriptions are given in annexes A1 and A2.

2. Specification of the intended use in accordance with the applicable European Assessment Document.

The performances given in section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer but are to be regarded only as a mean to choosing the right products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading), method A	See annexes C1, C3 and C4
Characteristic resistance to shear load (static and quasi-static loading).	See annexes C1 and C5
Displacements	See annex C6
Characteristic resistance and displacements for seismic performance category C1 and C2	See annexes C7 to C10

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for class A1
Resistance to fire	See annexes C11 and C12



English translation prepared by IETcc

4. Assessment and Verification of Constancy of Performances (hereinafter AVCP) system applied, with reference to its legal base

The applicable European legal act for the system of Assessment and Verification of Constancy of Performances (see annex V to Regulation (EU) No 305/2011) is 96/582/EC.

The system to be applied is 1.

5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document.

The technical details necessary for the implementation of the AVCP system are laid down in the quality plan deposited at Instituto de Ciencias de la Construcción Eduardo Torroja.

Prepared by: PhD Julián Rivera (Innovative Products Assessment Unit, IETcc-CSIC)

Issued in Madrid on 17th of February 2025

Mr. Ángel Castillo Talavera
Director


on behalf of Instituto de Ciencias de la Construcción Eduardo Torroja (IETcc – CSIC)

Código seguro de Verificación : GEN-0422-c0b2-8e5e-ca27-db1b-87d9-c5d9-5241 | Puede verificar la integridad de este documento en la siguiente dirección : <https://sede.administracion.gob.es/pagSedeFront/servicios/consultaCSV.htm>



Product and installed condition

BTP, BTP-G, BTP-X, BTP-A4 anchor

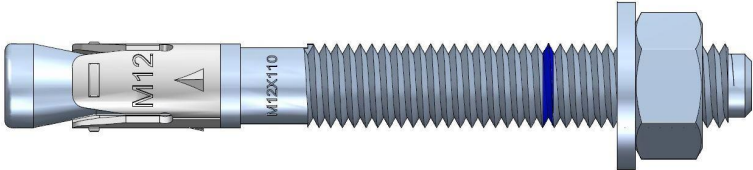


Identification on anchor:

- Expansion clip:
 - Anchor BTP: Company logo + "BTP" + Metric.
 - Anchor BTP-G: Company logo + "BTP-G" + Metric.
 - Anchor BTP-X: Company logo + "BTP-X" + Metric
 - Anchor BTP-A4: Company logo + "BTP-A4" + Metric
- Anchor body: Metric x Length
- Blue ring mark to show embedment depth
- Length letter code on head:

Letter on head	Length [mm]
C	68 ÷ 75
D	76 ÷ 88
E	89 ÷ 101
F	102 ÷ 113
G	114 ÷ 126
H	127 ÷ 139

Letter on head	Length [mm]
I	140 ÷ 151
J	152 ÷ 164
K	165 ÷ 177
L	178 ÷ 190
M	191 ÷ 202
N	203 ÷ 215

Letter on head	Length [mm]
O	216 ÷ 228
P	229 ÷ 240
Q	241 ÷ 253
R	254 ÷ 266
S	267 ÷ 300

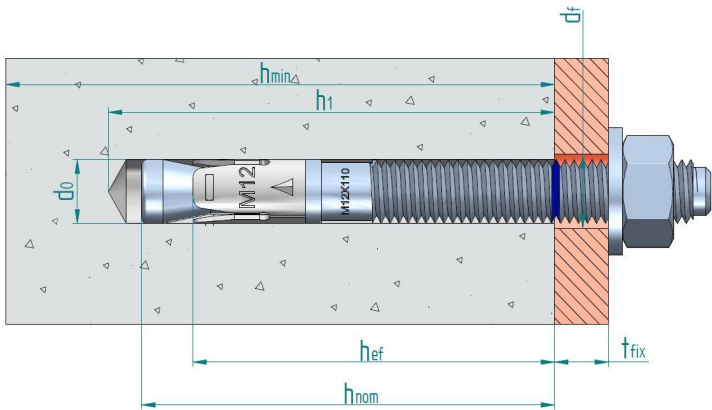

- d_0 : Nominal diameter of drill bit
 d_f : Fixture clearance hole diameter
 h_{ef} : Effective anchorage depth
 h_1 : Depth of drilled hole
 h_{nom} : Overall anchor embedment depth in the concrete
 h_{min} : Minimum thickness of concrete member
 t_{fix} : Fixture thickness

BTP, BTP-G, BTP-X, BTP-A4 anchors

Product description

Installed condition

Annex A1



Table A1: materials

Item	Designation	Material for BTP	Material for BTP-A4
1	Anchor body	M8 to M20: carbon steel wire rod, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0 with antifriction coating M24: machined carbon steel, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0 with antifriction coating	Stainless steel, grade A4
2	Washer	DIN 125, DIN 9021, DIN 440 galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0	DIN 125, DIN 9021, DIN 440 stainless steel, grade A4
3	Nut	DIN 934 class 6, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0	Stainless steel, grade A4 with antifriction coating
4	Expansion clip	Stainless steel	Stainless steel, grade A4, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0

Item	Designation	Material for BTP-G	Material for BTP-X
1	Anchor body	Carbon steel wire rod, sherardized $\geq 40 \mu\text{m}$ EN 13811	Carbon steel wire rod, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0 with antifriction coating
2	Washer	DIN 125, DIN 9021, DIN 440 sherardized $\geq 40 \mu\text{m}$ EN 13811	DIN 125, DIN 9021, DIN 440 galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0
3	Nut	DIN 934 class 6, sherardized $\geq 40 \mu\text{m}$ EN 13811	DIN 934 class 6 galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0
4	Expansion clip	Stainless steel	Carbon steel strip, sherardized $\geq 15 \mu\text{m}$ EN 13811

BTP, BTP-G, BTP-X, BTP-A4 anchors

Product description

Materials

Annex A2



Specifications of intended use

Version	Intended use	M8	M10	M12	M16	M20	M24
BTP	Static or quasi static loads	✓	✓	✓	✓	✓	✓
	Seismic loads category C1		✓	✓	✓		
	Seismic loads category C2			✓	✓		
	Resistance to fire exposure	✓	✓	✓	✓	✓	✓
BTP-G	Static or quasi static loads	✓	✓	✓	✓	✓	
	Seismic loads category C1	✓	✓	✓	✓	✓	
	Seismic loads category C2			✓	✓	✓	
	Resistance to fire exposure	✓	✓	✓	✓	✓	
BTP-X	Static or quasi static loads	✓	✓	✓	✓	✓	
	Seismic loads category C1	✓	✓	✓	✓	✓	
	Seismic loads category C2		✓	✓		✓	
	Resistance to fire exposure	✓	✓	✓	✓	✓	
BTP-A4	Static or quasi static loads	✓	✓	✓	✓	✓	
	Seismic loads category C1		✓	✓	✓	✓	
	Seismic loads category C2		✓	✓	✓	✓	
	Resistance to fire exposure	✓	✓	✓	✓	✓	

Base materials:

- Reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021
- Cracked or uncracked concrete

Use conditions (environmental conditions):

- Temperature range of the anchorage base material during the working life: -40 °C to +80 °C.
- BTP, BTP-X: anchorages subjected to dry internal conditions.
- BTP-G:
 - Anchorage in cracked concrete: dry internal conditions
 - Anchorage in uncracked concrete: durability depending on the following environmental corrosivity categories according to ISO 9223:2012:

Corrosivity category	Corrosivity	Durability [years]
C1	Very low	50 ¹⁾
C2	Low	50 ¹⁾
C3	Medium	19
C4	High	9.5
C5	Very high	4.7
CX	Extreme	--

1) Working life of fastener limited to 50 years according to EAD 330232-01-0601 section 1.2.2

BTP, BTP-G, BTP-X, BTP-A4 anchors

Intended use

Specifications

Annex B1



- BTP-A4: anchorages subjected to dry internal conditions, to external atmospheric exposure (including industrial and marine environment) or to permanent internal damp conditions if no particular aggressive conditions exist. Such particular aggressive conditions are e.g., permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g., in desulphurization plants or road tunnels where de-icing materials are used). Atmospheres under Corrosion Resistance Class CRC III according to EN 1993-1-4:2006+A1:2015 annex A.

Corrosivity category	Corrosivity	Typical environments – Examples	
		Indoor	Outdoor
C1	Very low	Heated spaces with low relative humidity and insignificant pollution; e.g., offices, schools, museums.	Dry or cold zone, atmospheric environment with very low pollution and time of wetness; e.g., certain deserts, Central Arctic/Antarctic.
C2	Low	Unheated spaces with varying temperature and relative humidity. Low frequency of condensation and low pollution; e.g., storage, sport halls.	Temperate zone, atmospheric environment with low pollution ($\text{SO}_2 < 5 \mu\text{g}/\text{m}^3$); e.g., rural areas, small towns. Dry or cold zone, atmospheric environment with short time or wetness, e.g., deserts, subarctic areas.
C3	Medium	Spaces with moderate frequency of condensation and moderate pollution from production process; e.g., food-processing plants, laundries, breweries, dairies.	Temperate zone, atmospheric environment with medium pollution ($\text{SO}_2 5 \mu\text{g}/\text{m}^3$ to $30 \mu\text{g}/\text{m}^3$), or some effect of chlorides, e.g., urban areas, coastal areas with low deposition of chlorides. Subtropical and tropical zone, atmosphere with low pollution.
C4	High	Spaces with high frequency of condensation and high pollution from production process; e.g., industrial processing plants.	Temperate zone, atmospheric environment with high pollution ($\text{SO}_2 30 \mu\text{g}/\text{m}^3$ to $90 \mu\text{g}/\text{m}^3$), or substantial effect of chlorides; e.g., polluted urban areas, industrial areas, coastal areas without spray of salt water or exposure to strong effect of de-icing salts. Subtropical and tropical zone, atmosphere with medium pollution.
C5	Very High	Spaces with very high frequency of condensation and/or high pollution from production process; e.g., mines, caverns for industrial purposes, unventilated sheds in subtropical and tropical zones	Temperate zone, atmospheric environment with very high pollution ($\text{SO}_2 90 \mu\text{g}/\text{m}^3$ to $250 \mu\text{g}/\text{m}^3$), or significant effect of chlorides; e.g., industrial areas, coastal areas, sheltered positions on coastline. Subtropical and tropical zone, atmosphere with medium pollution.
CX	Extreme	Spaces with almost permanent condensation or extensive periods of exposure to extreme humidity effects and/or high pollution from production process; e.g., unventilated sheds in humid tropical zones with penetration of outdoor pollution including airborne chlorides and corrosion-stimulating particulate matter	Subtropical and tropical zone (very high time of wetness), atmospheric environment with very high SO_2 pollution (higher than $250 \mu\text{g}/\text{m}^3$) including accompanying and production factors and/or strong effect of chlorides; e.g., extreme industrial areas, coastal and offshore areas, occasional contact with salt spray.

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete.
- Verifiable calculation rules and drawings are prepared taking into account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method A in accordance with EN 1992-4:2018
- Anchorages under seismic actions are designed in accordance with EN 1992-4:2018. Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure. Fastening in stand-off installation or with grout layer are not allowed.
- Anchorages under fire exposure are designed in accordance with EN 1992-4:2018. It must be ensured that local spalling of the concrete cover does not occur.

BTP, BTP-G, BTP-X, BTP-A4 anchors

Intended use

Specifications

Annex B2



Installation:

- Hole drilling by rotary plus hammer mode.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.

BTP, BTP-G, BTP-X, BTP-A4 anchors

Intended use

Specifications

Annex B3



Table C1: Installation parameters for BTP, BTP-G, BTP-X anchors

Installation parameters			Performances					
			M8	M10	M12	M16	M20	M24
d ₀	Nominal diameter of drill bit:	[mm]	8	10	12	16	20	24
d _f	Fixture clearance hole diameter:	[mm]	9	12	14	18	22	26
T _{inst}	Nominal installation torque:	[Nm]	20 / 15 ¹⁾	40	60	100	200	250
L _{min}	Minimum total length of the bolt:	[mm]	68	82	98	119	140	175
h ₁	Depth of drilled hole:	[mm]	60	75	85	105	125	155
h _{nom}	Overall anchor embedment depth in the concrete:	[mm]	55	68	80	97	114	143
h _{ef}	Effective anchorage depth:	[mm]	48	60	70	85	100	125
t _{fix}	Thickness of fixture for washer DIN 125 ≤ ²⁾	[mm]	L - 66	L - 80	L - 96	L - 117	L - 138	L - 170
t _{fix}	Thickness of fixture for washers DIN 9021, DIN 440 ≤ ²⁾	[mm]	L - 67	L - 81	L - 97	L - 118	L - 139	L - 171
S _{min}	Minimum allowable spacing:	[mm]	40	40	60	65	95	125
	for edge distance c ≥	[mm]	55	70	75	95	105	125
C _{min}	Minimum allowable distance:	[mm]	45	45	55	70	95	125
	for spacing s ≥	[mm]	55	90	110	115	105	125
h _{min}	Minimum thickness of concrete member: BTP, BTP-G	[mm]	100	120	140	170	200	250
h _{min}	Minimum thickness of concrete member: BTP-X	[mm]	80	90	105	130	150	--

¹⁾ Respective values for anchors BTP / BTP-G, BTP-X

²⁾ L = total anchor length,

Table C2: Installation parameters for BTP-A4 anchor

Installation parameters			Performances				
			M8	M10	M12	M16	M20
d ₀	Nominal diameter of drill bit:	[mm]	8	10	12	16	20
d _f	Fixture clearance hole diameter:	[mm]	9	12	14	18	22
T _{inst}	Nominal installation torque:	[Nm]	15	30	60	100	200
L _{min}	Minimum total length of the bolt:	[mm]	68	82	98	119	140
h ₁	Depth of drilled hole:	[mm]	60	75	85	105	125
h _{nom}	Overall anchor embedment depth in the concrete:	[mm]	55	68	80	97	114
h _{ef}	Effective anchorage depth:	[mm]	48	60	70	85	100
t _{fix}	Thickness of fixture for washer DIN 125 ≤ ¹⁾	[mm]	L - 66	L - 80	L - 96	L - 117	L - 138
t _{fix}	Thickness of fixture for washers DIN 9021, DIN 440 ≤ ¹⁾	[mm]	L - 67	L - 81	L - 97	L - 118	L - 139
S _{min}	Minimum allowable spacing:	[mm]	42	47	57	75	100
C _{min}	Minimum allowable distance:	[mm]	47	52	62	75	90
h _{min}	Minimum thickness of concrete member:	[mm]	100	120	140	170	200

¹⁾ L = total anchor length

BTP, BTP-G, BTP-X, BTP-A4 anchors


Performances

Installation parameters

Annex C1



Installation process

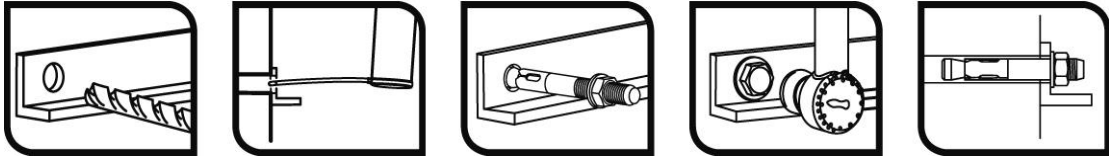

BTP, BTP-G, BTP-X, BTP-A4 anchors

Performances

Installation procedure

Annex C2



Table C3: Essential characteristics under static or quasi-static tension loads according to design method A according to EN 1992-4 for BTP, BTP-G, BTP-X anchors

Essential characteristics under static or quasi-static tension loads according to design method A			Performances						
			M8	M10	M12	M16	M20	M24	
Tension loads: steel failure									
N _{Rk,s}	Characteristic resistance:	[kN]	18.1	31.4	40.4	72.7	116.6	179.2	
γ _{Ms}	Partial safety factor: ¹⁾	[-]	1.5	1.5	1.5	1.5	1.5	1.5	
Tension loads: pull-out failure in concrete									
BTP anchor									
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	18	20	36	48	55	
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	5	9.5	12	25	32	35	
BTP-G anchor									
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	10	18		36	≥N ⁰ _{Rk,c} ²⁾	--	
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	6	10	16	≥N ⁰ _{Rk,c} ²⁾	30	--	
BTP-X anchor									
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	10	18	28	34	≥N ⁰ _{Rk,c} ²⁾	--	
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	7	11	15	≥N ⁰ _{Rk,c} ²⁾	≥N ⁰ _{Rk,c} ²⁾	--	
γ _{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2	
Ψ _c	Increasing factor for N ⁰ _{Rk,p} :	C30/37	[-]	1.22	1.17	1.22	1.22	1.17	1.22
		C40/50	[-]	1.41	1.31	1.41	1.41	1.31	1.41
		C50/60	[-]	1.58	1.43	1.58	1.58	1.43	1.58
Tension loads: concrete cone and splitting failure									
h _{ef}	Effective embedment depth:	[mm]	48	60	70	85	100	125	
k _{ucr,N}	Factor for uncracked concrete:	[-]	11.0						
k _{cr,N}	Factor for cracked concrete:	[-]	7.7						
γ _{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2	
S _{cr,N}	Concrete cone failure:	[mm]	3 x h _{ef}						
C _{cr,N}		[mm]	1.5 x h _{ef}						
S _{cr,sp}	Splitting failure:	[mm]	288	300	350	425 / 510 ³⁾	500 / 600 ³⁾	560	
C _{cr,sp}		[mm]	144	150	175	213 / 255 ³⁾	250 / 300 ³⁾	280	

- 1) In absence of other national regulations
- 2) Pull out failure is not decisive. $N_{Rk,c}^{0(2)}$ calculated according to EN 1992-4
- 3) Respective values for anchors BTP / BTP-G, BTP-X

BTP, BTP-G, BTP-X anchors

Performances

Essential characteristics under static or quasi-static tension loads

Annex C3



English translation prepared by IETcc

Table C4: Essential characteristics under static or quasi-static tension loads according to design method A according to EN 1992-4 for BTP-A4 anchor

Essential characteristics under static or quasi-static tension loads according to design method A				Performances				
				M8	M10	M12	M16	M20
Tension loads: steel failure								
N _{Rk,s}	Characteristic resistance:		[kN]	18.5	30.9	45.5	71.5	122.5
γ _{Ms}	Partial safety factor ¹⁾ :		[-]	1.4	1.4	1.4	1.4	1.4
Tension loads: pull-out failure in concrete								
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:		[kN]	12	16	22	≥N ⁰ _{Rk,c} ²⁾	≥N ⁰ _{Rk,c} ²⁾
ψ _c	Increasing factor for N ⁰ _{Rk,p} :	C30/37	[-]	1.22	1.22	1.22	1.22	1.09
		C40/50	[-]	1.41	1.41	1.41	1.41	1.16
		C50/60	[-]	1.58	1.58	1.58	1.58	1.22
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:		[kN]	8.5	14	19	≥N ⁰ _{Rk,c} ²⁾	≥N ⁰ _{Rk,c} ²⁾
ψ _c	Increasing factor for N ⁰ _{Rk,p} :	C30/37	[-]	1.01	1.00	1.09	1.09	1.17
		C40/50	[-]	1.02	1.00	1.15	1.16	1.32
		C50/60	[-]	1.02	1.00	1.20	1.22	1.44
γ _{ins}	Installation safety factor:		[-]	1.0	1.0	1.2	1.2	1.2
Tension loads: concrete cone and splitting failure								
h _{ef}	Effective embedment depth:		[mm]	48	60	70	85	100
k _{ucr,N}	Factor for uncracked concrete:		[-]	11.0				
k _{cr,N}	Factor for cracked concrete:		[-]	7,7				
γ _{ins}	Installation safety factor:		[-]	1.0	1.0	1.2	1.2	1.2
S _{cr,N}	Concrete cone failure:	[mm]	3 x h _{ef}					
C _{cr,N}		[mm]	1.5 x h _{ef}					
S _{cr,sp}	Splitting failure:	[mm]	164	204	238	290	380	
C _{cr,sp}		[mm]	82	102	119	145	190	

- 1) In absence of other national regulations
2) Pull out failure is not decisive. $N_{Rk,c}^0$ calculated according to EN 1992-4

BTP-A4 anchors

Performances

Essential characteristics under static or quasi-static tension loads

Annex C4



Table C5: Essential characteristics under static or quasi-static shear loads of design method A according to EN 1992-4 for BTP, BTP-G, BTP-X anchors

Essential characteristics under static or quasi-static shear loads according to design method A			Performances					
			M8	M10	M12	M16	M20	M24
Shear loads: steel failure without lever arm								
V _{Rk,s}	Characteristic resistance:	[kN]	11.0	17.4	25.3	47.1	73.1	84.7
k ₇	Ductility factor:	[-]	1.00					
γ _{Ms}	Partial safety factor ¹⁾ :	[-]	1.25	1.25	1.25	1.25	1.25	1.25
Shear loads: steel failure with lever arm								
M ⁰ _{Rk,s}	Characteristic bending moment:	[Nm]	22.5	44.8	78.6	199.8	389.4	673.5
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
Shear loads: concrete pryout failure								
k ₈	Pryout factor:	[-]	1	2	2	2	2	2
γ _{ins}	Installation safety factor:	[-]	1.00					
Shear loads: concrete edge failure								
l _f	Effective length of anchor under shear loads:	[mm]	48	60	70	85	100	125
d _{nom}	Outside anchor diameter:	[mm]	8	10	12	16	20	24
γ _{ins}	Installation safety factor:	[-]	1.00					

1) In absence of other national regulations

Table C6 Essential characteristics under static or quasi-static shear loads of design method A according to EN 1992-4 for BTP-A4 anchor

Essential characteristics under static or quasi-static shear loads according to design method A			Performances				
			M8	M10	M12	M16	M20
Shear loads: steel failure without lever arm							
V _{Rk,s}	Characteristic resistance:	[kN]	11.9	18.9	27.4	55.0	85.9
k ₇	Ductility factor:	[-]	1.00				
γ _{Ms}	Partial safety factor ¹⁾ :	[-]	1.25	1.25	1.25	1.25	1.25
Shear loads: steel failure with lever arm							
M ⁰ _{Rk,s}	Characteristic bending moment:	[Nm]	26.2	52.3	91.7	233.1	454.3
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25
Shear loads: concrete pryout failure							
k ₈	Pryout factor:	[-]	1	2	2	2	2
γ _{ins}	Installation safety factor:	[-]	1.00				
Shear loads: concrete edge failure							
l _f	Effective length of anchor under shear loads:	[mm]	48	60	70	85	100
d _{nom}	Outside anchor diameter:	[mm]	8	10	12	16	20
γ _{ins}	Installation safety factor:	[-]	1.00				

1) In absence of other national regulations

BTP, BTP-G, BTP-X, BTP-A4 anchors

Performances

Essential characteristics under static or quasi-static shear loads

Annex C5



Table C7: Displacements under tension loads for BTP, BTP-G, BTP-X, BTP-A4 anchors

Displacements under tension loads			Performances					
			M8	M10	M12	M16	M20	M24
BTP anchor								
N	Service tension load:	[kN]	2.5	4.3	6.3	10.4	13.9	18.0
δ_{N0}	Short term displacement:	[mm]	1.1	0.7	1.0	0.4	1.6	0.4
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	2.0
BTP-G anchor								
N	Service tension load:	[kN]	2.5	4.3	6.3	10.4	13.9	--
δ_{N0}	Short term displacement:	[mm]	1.0	1.1	0.9	1.5	1.2	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	--
BTP-X anchor								
N	Service tension load:	[kN]	2.5	4.3	7.6	11.9	14.3	--
δ_{N0}	Short term displacement:	[mm]	1.0	1.1	0.9	1.5	1.3	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.6	1.6	1.6	1.6	1.6	--
BTP-A4 anchor								
N	Service tension load in non cracked concrete:	[kN]	5.7	7.6	8.7	15.3	19.5	--
δ_{N0}	Short term displacement:	[mm]	1.4	1.4	1.4	1.8	1.8	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	--
BTP-A4 anchor								
N	Service tension load in cracked cocnrete:	[kN]	4.0	6.7	7.5	10.7	13.7	--
δ_{N0}	Short term displacement:	[mm]	1.2	1.3	1.3	1.3	1.3	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.7	1.7	1.7	1.7	1.7	--

Table C8: Displacements under shear load for BTP, BTP-G, BTP-X, BTP-A4 anchors

Displacements under shear loads			Performances					
			M8	M10	M12	M16	M20	M24
BTP anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	33.6
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	1.4
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	2.1
BTP-G anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	-
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	--
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	--
BTP-X anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	--
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	--
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	--
BTP-A4 anchor								
V	Service shear load:	[kN]	6.8	10.8	15.7	31.4	46.9	--
δ_{V0}	Short term displacement:	[mm]	1.9	1.6	1.6	2.2	2.2	--
$\delta_{V\infty}$	Long term displacement:	[mm]	2.4	2.4	2.4	3.3	3.3	--

BTP, BTP-G, BTP-X, BTP-A4 anchors

Performances

Displacements under static or quasi-static tension and shear loads

Annex C6



Table C9: Essential characteristics for seismic performance category C1 BTP, BTP-G, BTP-X anchors

Essential characteristics for seismic performance category C1			Performances					
			M8	M10	M12	M16	M20	M24
Steel tension failure								
$N_{Rk,s,C1}$	Characteristic tension steel failure:	[kN]	18.1	31.4	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	1.5	1.5	1.5	1.5	1.5	--
Steel shear failure								
BTP anchor								
$V_{Rk,s,C1}$	Characteristic shear steel failure:	[kN]	--	12.2	17.8	33.0	--	--
BTP-G anchor								
$V_{Rk,s,C1}$	Characteristic shear steel failure:	[kN]	6.6	12.5	18.9	35.4	54.8	--
BTP-X anchor								
$V_{Rk,s,C1}$	Characteristic shear steel failure:	[kN]	7.7	12.2	17.8	33.0	58.5	--
α_{gap}	Factor for annular gap:	[-]	0.5					--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	--
Pull out failure								
BTP anchor								
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	--	5.3	8.4	17.5	--	--
BTP-G anchor								
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	6.0	9.0	16.0	25.0	30.0	--
BTP-X anchor								
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	5.9	8.9	16.0	25.0	30.0	--
γ_{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	--
Concrete cone failure								
h_{ef}	Effective embedment depth:	[mm]	48	60	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	$3 \times h_{ef}$					--
$c_{cr,N}$	Edge distance:	[mm]	$1.5 \times h_{ef}$					--
γ_{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	--
Concrete pryout failure								
k_8	Pryout factor:	[-]	1	2	2	2	2	--
Concrete edge failure								
l_t	Effective length of anchor:	[mm]	48	60	70	85	100	--
d_{nom}	Outside anchor diameter:	[-]	8	10	12	16	20	--

BTP, BTP-G, BTP-X anchors

Performances

Essential characteristics for seismic performance category C1

Annex C7



Table C10: Essential characteristics for seismic performance category C1 BTP-A4 anchors

Essential characteristics for seismic performance category C1			Performances				
			M8	M10	M12	M16	M20
Steel tension failure							
$N_{Rk,s,C1}$	Characteristic tension steel failure:	[kN]	--	30.9	45.5	71.5	122.5
$\gamma_{Ms,N}$	Partial safety factor:	[-]	--	1.4	1.4	1.4	1.4
Steel shear failure							
$V_{Rk,s,C1}$	Characteristic shear steel failure:	[kN]	--	10.6	19.2	40.2	45.5
α_{gap}	Factor for annular gap:	[-]	--	0.5			
$\gamma_{Ms,V}$	Partial safety factor:	[-]	--	1.25	1.25	1.25	1.25
Pull out failure							
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	--	6.4	11.8	17.5	20.6
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.2	1.2	1.2
Concrete cone failure							
h_{ef}	Effective embedment depth:	[mm]	--	60	70	85	100
$S_{cr,N}$	Spacing:	[mm]	--	$3 \times h_{ef}$			
$C_{cr,N}$	Edge distance:	[mm]	--	$1.5 \times h_{ef}$			
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.2	1.2	1.2
Concrete pryout failure							
k_8	Pryout factor:	[-]	--	2	2	2	2
Concrete edge failure							
l_f	Effective length of anchor:	[mm]	--	60	70	85	100
d_{nom}	Outside anchor diameter:	[-]	--	10	12	16	20

BTP-A4 anchors

Performances

Essential characteristics for seismic performance category C1

Annex C8



Table C11: Essential characteristics for seismic performance category C2 BTP, BTP-G, BTP-X anchors

Essential characteristics for seismic performance category C2			Performances					
			M8	M10	M12	M16	M20	M24
Steel tension and shear failure								
$N_{Rk,s,C2}$	Characteristic tension steel failure:	[kN]	--	31.4	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	--	1.5	1.5	1.5	1.5	--
$V_{Rk,s,C2}$	Characteristic shear steel failure:	[kN]	--	12.2	17.8	33.0	58.5	--
α_{gap}	Factor for annular gap	[-]	--	0.5	0.5	0.5	0.5	--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	--	1.25	1.25	1.25	1.25	--
Pull out failure								
BTP anchor								
$N_{Rk,p,C2}$	Characteristic pull out failure:	[kN]	--	--	5.2	8.9	--	--
BTP-G anchor								
$N_{Rk,p,C2}$	Characteristic pull out failure:	[kN]	--	--	5.9	16.3	17.2	--
BTP-X anchor								
$N_{Rk,p,C2}$	Characteristic pull out failure:	[kN]	--	3.9	9.1	--	21.0	--
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.0	1.0	1.0	--
Concrete cone failure								
h_{ef}	Effective embedment depth:	[mm]	--	60	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	--	$3 \times h_{ef}$				--
$c_{cr,N}$	Edge distance:	[mm]	--	$1.5 \times h_{ef}$				--
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.0	1.0	1.0	--
Concrete pryout failure								
k_8	Pryout factor:	[-]	--	2	2	2	2	--
Concrete edge failure								
l_f	Effective length of anchor:	[mm]	--	60	70	85	100	--
d_{nom}	Outside anchor diameter:	[-]	--	10	12	16	20	--
Displacements								
BTP anchor								
$\delta_{N,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	2.34	3.99	--	--
$\delta_{V,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	5.53	5.96	--	--
$\delta_{N,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	9.54	10.17	--	--
$\delta_{V,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	9.08	10.66	--	--
BTP-G anchor								
$\delta_{N,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	6.79	5.21	5.72	--
$\delta_{V,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	5.53	5.96	6.37	--
$\delta_{N,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	24.70	19.58	17.20	--
$\delta_{V,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	9.08	10.66	12.32	--
BTP-X anchor								
$\delta_{N,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	3.15	5.57	--	6.82	--
$\delta_{V,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	5.61	5.53	--	6.37	--
$\delta_{N,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	14.77	20.31	--	29.12	--
$\delta_{V,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	8.68	9.08	--	12.32	--

¹⁾ The listed displacements represent mean values

²⁾ A small displacement may be required in the design in the case of displacements sensitive fastening of "rigid" supports. The characteristics resistance associated with such small displacements may be determined by linear interpolation or proportional reduction.

BTP, BTP-G, BTP-X anchors

Performances

Essential characteristics for seismic performance category C2

Annex C9



Table C12: Essential characteristics for seismic performance category C2 BTP-A4 anchors

Essential characteristics for seismic performance category C2			Performances				
			M8	M10	M12	M16	M20
Steel tension and shear failure							
$N_{Rk,s,C2}$	Characteristic tension steel failure:	[kN]	--	30.9	45.5	71.5	122.5
$\gamma_{Ms,N}$	Partial safety factor:	[-]	--	1.4	1.4	1.4	1.4
$V_{Rk,s,C2}$	Characteristic shear steel failure:	[kN]	--	10.6	19.2	40.2	45.5
α_{gap}	Factor for annular gap	[-]	--	0.5	0.5	0.5	0.5
$\gamma_{Ms,V}$	Partial safety factor:	[-]	--	1.25	1.25	1.25	1.25
Pull out failure							
$N_{Rk,p,C2}$	Characteristic pull out failure:	[kN]	--	3.0	4.0	15.8	15.7
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.2	1.2	1.2
Concrete cone failure							
h_{ef}	Effective embedment depth:	[mm]	--	60	70	85	100
$s_{cr,N}$	Spacing:	[mm]	--	$3 \times h_{ef}$			
$c_{cr,N}$	Edge distance:	[mm]	--	$1.5 \times h_{ef}$			
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.2	1.2	1.2
Concrete pryout failure							
k_8	Pryout factor:	[-]	--	2	2	2	2
Concrete edge failure							
l_t	Effective length of anchor:	[mm]	--	60	70	85	100
d_{nom}	Outside anchor diameter:	[-]	--	10	12	16	20
Displacements							
$\delta_{N,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	2.6	4.9	5.2	5.5
$\delta_{V,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	4.5	4.5	5.2	5.6
$\delta_{N,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	9.3	15.2	13.2	15.7
$\delta_{V,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	6.9	7.2	8.3	7.9

¹⁾ The listed displacements represent mean values

²⁾ A small displacement may be required in the design in the case of displacements sensitive fastening of "rigid" supports. The characteristics resistance associated with such small displacements may be determined by linear interpolation or proportional reduction.

BTP-A4 anchors

Performances

Essential characteristics for seismic performance category C2

Annex C10



Table C13: Essential characteristics under fire exposure BTP, BTP-G, BTP-X anchors

Essential characteristics under fire exposure				Performances					
				M8	M10	M12	M16	M20	M24
Steel failure									
N _{Rk,s,fi}	Characteristic tension resistance:	R30	[kN]	0,4	0,9	1,7	3,1	4,9	7,1
		R60	[kN]	0,3	0,8	1,3	2,4	3,7	5,3
		R90	[kN]	0,3	0,6	1,1	2,0	3,2	4,6
		R120	[kN]	0,2	0,5	0,8	1,6	2,5	3,5
V _{Rk,s,fi}	Characteristic shear resistance:	R30	[kN]	0,4	0,9	1,7	3,1	4,9	7,1
		R60	[kN]	0,3	0,8	1,3	2,4	3,7	5,3
		R90	[kN]	0,3	0,6	1,1	2,0	3,2	4,5
		R120	[kN]	0,2	0,5	0,8	1,6	2,5	3,5
M ⁰ _{Rk,s,fi}	Characteristic bending resistance:	R30	[Nm]	0,4	1,1	2,6	6,7	13,0	22,5
		R60	[Nm]	0,3	1,0	2,0	5,0	9,7	16,8
		R90	[Nm]	0,3	0,7	1,7	4,3	8,4	14,6
		R120	[Nm]	0,2	0,6	1,3	3,3	6,5	11,2
Pull out failure									
N _{Rk,p,fi}	Characteristic resistance:	R30							
		R60	[kN]	1,3/1,5 ¹⁾	2,3	3,0/4,0 ¹⁾	6,3	7,5	7,5
		R90							
		R120	[kN]	1,0/1,2 ¹⁾	1,8	2,4/3,2 ¹⁾	5,0	6,0	6,0
Concrete cone failure ²⁾									
N _{Rk,c,fi}	Characteristic resistance:	R30							
		R60	[kN]	2,9	5,0	7,4	12,0	18,0	31,4
		R90							
		R120	[kN]	2,3	4,0	5,9	9,6	14,4	25,2
S _{cr,N,fi}	Critical spacing:	R30 to R120	[mm]	4 x h _{ef}					
S _{min,fi}	Minimum spacing:	R30 to R120	[mm]	50	60	70	85/128 ¹⁾	100/150 ¹⁾	125
C _{cr,N,fi}	Critical edge distance:	R30 to R120	[mm]	2 x h _{ef}					
C _{min,fi}	Minimum edge distance:	R30 to R120	[mm]	c _{min} = 2 x h _{ef} ; if fire attack comes from more than one side, the edge distance of the anchor has to be ≥ 300 mm and ≥ 2 x h _{ef}					
Concrete pry out failure									
k ₈	Pryout factor:	R30 to R120	[-]	1	2	2	2	2	2

¹⁾ Respective values for anchors BTP / BTP-G, BTP-X

²⁾ As a rule, splitting failure can be neglected since cracked concrete and reinforcement is assumed.

In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{m,fi} = 1,0$ is recommended

BTP, BTP-G, BTP-X anchors

Performances

Essential characteristics under fire exposure

Annex C11



Table C14: Essential characteristics under fire exposure BTP-A4 anchor

Essential characteristics under fire exposure				Performances				
				M8	M10	M12	M16	M20
Steel failure								
N _{Rk,s,fi}	Characteristic tension resistance:	R30	[kN]	4,20	7,11	11,00	20,49	31,97
		R60	[kN]	2,96	5,84	10,16	18,93	29,53
		R90	[kN]	1,73	3,47	6,10	11,37	17,74
		R120	[kN]	1,11	2,28	4,08	7,59	11,85
V _{Rk,s,fi}	Characteristic shear resistance:	R30	[kN]	4,20	7,11	11,00	20,49	31,97
		R60	[kN]	2,96	5,84	10,16	18,93	29,53
		R90	[kN]	1,73	3,47	6,10	11,37	17,74
		R120	[kN]	1,11	2,28	4,08	7,59	11,85
M ⁰ _{Rk,s,fi}	Characteristic bending resistance:	R30	[Nm]	4,30	9,16	17,09	43,45	84,70
		R60	[Nm]	3,03	7,53	15,79	40,14	78,24
		R90	[Nm]	1,77	4,47	9,49	24,12	47,01
		R120	[Nm]	1,14	2,95	6,34	16,10	31,39
Pull out failure								
N _{Rk,p,fi}	Characteristic resistance:	R30						
		R60	[kN]	2,1	3,5	4,8	6,74	8,60
		R90						
		R120	[kN]	1,7	2,8	3,8	5,39	6,88
Concrete cone failure ¹⁾								
N _{Rk,c,fi}	Characteristic resistance:	R30						
		R60	[kN]	2,7	4,8	7,1	11,5	17,2
		R90						
		R120	[kN]	2,2	43,8	5,6	9,2	13,8
Scr,N,fi	Critical spacing:	R30 to R120	[mm]	4 x hef				
Smin,fi	Minimum spacing:	R30 to R120	[mm]	42	47	57	75	100
Ccr,N,fi	Critical edge distance:	R30 to R120	[mm]	2 x hef				
Cmin,fi	Minimum edge distance:	R30 to R120	[mm]	Cmin = 2 x hef; if fire attack comes from more than one side, the edge distance of the anchor has to be ≥ 300 mm and ≥ 2 x hef				
Concrete pry out failure								
k8	Pryout factor:	R30 to R120	[-]	1	2	2	2	2

¹⁾ As a rule, splitting failure can be neglected since cracked concrete and reinforcement is assumed.

In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{m,fi} = 1,0$ is recommended

BTP-A4 anchors

Performances

Essential characteristics under fire exposure

Annex C12

